

# Float Swing

HodgePodge


















Published: September 2025

## Float Swing Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

On the Float Swing, the fun really starts! The nest swing is free-hanging and can be rotated flexibly in any direction. Due to the low height, it is also accessible for smaller or physically impaired children.

95.190.725

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	4,5 × 1,8 × 2,6 14-8 × 5-10 × 8-6
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	9,5 × 8,0 9,4 × 7,2 30-10 × 23-7
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,42 7-8
	Age	5
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	57,3 572,3
	Number of Foundations	2
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	3,4 120,1
	Number of skilled Installers required	2
	Installation Time without Foundation	3 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,2 × 1,4 × 4,2 0-8 × 4-8 × 13-10
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	110,0 242,5
	Shipping Volume (m³) Shipping Volume (ft³)	4,6 162,4
	Total Weight (kg) Total Weight (lbs)	820,0 1807,8
	Spare Part Guarantee	Lifelong


The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.  
The following text can also be used for tenders.

Posts:  
Steel pipes Ø 168,3 mm (6 5/8"), wall thickness 10 mm (3/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Nest Swing Seat:  
Ø 1000 mm (3'-3 3/8"). Galvanized steel ring covered with shock-absorbing material and wrapped with rope. Tight-knit net made of rope Ø 16 mm (5/8") is hung into the ring. The connection parts are made of stainless steel.

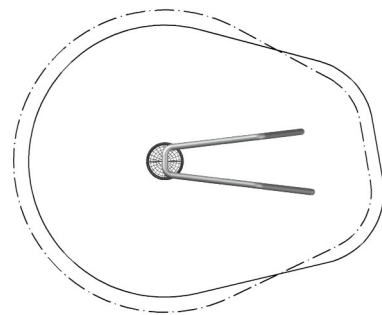

1:200