

# Side-by-Side Swing

HodgePodge



Published: March 2025

## Side-by-Side Swing Product Specification
















HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Swinging together is still the most fun! Whether on classic seats or in the cool nest swing – with the Side-by-Side Swing you can let the breeze caress your face. And due to the low entry height of the nest swing, even the little ones will get the most fun out of swinging.

# Side-by-Side Swing

Published: March 2025

90.340.055

	Product Family	HodgePodge
	Length x Width x Height (m) Length x Width x Height ("")	6,8 x 1,6 x 3,1 22-2 x 5-3 x 9-11
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	8,1 x 6,0 10,3 x 9,8 33-10 x 32-0
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,42 8-0
	Age	3
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	45,4 769,6
	Number of Foundations	3
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	2,1 74,2
	Number of skilled Installers required	3
	Installation Time without Foundation	3 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,2 x 0,6 x 3,0 0-8 x 2-0 x 9-11
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	95,0 209,4
	Shipping Volume (m³) Shipping Volume (ft³)	3,9 137,7
	Total Weight (kg) Total Weight (lbs)	580,0 1278,7
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.  
The following text can also be used for tenders.

### Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Tubes:

Framework®- stainless steel tubes Ø 60,3 mm (2 3/8"), smoothed and brushed.

### Spheres:


Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

### Terranos®- Clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes.

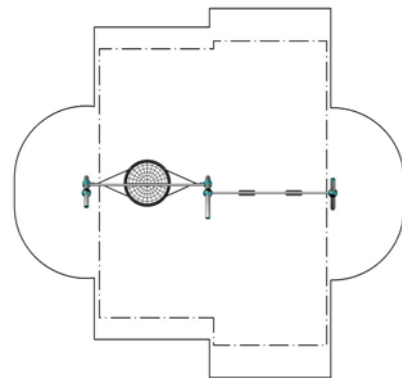

1:200