

Spaceball M

Univers



Published: March 2025

Spaceball M
















Product Specification

Univers showcases see-through outer frame structures with three-dimensional nets inside. This includes classic forms like the Spaceball and Neptun. But also in the Joe Brown Collection, the three-dimensional network found a new home in The Globe or The Cube – the first wooden spatial net structures. All tensioning points are provided with the patented AstemTT tensioning sys-

tem. This ensures that no technical connecting elements or rope loops are located in the play area.

The voluminous Spaceball M invites older kids to climb together with others.

90.100.041

	Product Family	Univers
	Length × Width × Height (m) Length × Width × Height ("")	4,4 × 4,4 × 3,8 14-5 × 14-5 × 12-5
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	7,5 × 7,5 8,1 × 8,1 26-5 × 26-5
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,59 6-0
	Age	5
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	42,1 523,7
	Number of Foundations	4
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	0,4 14,1
	Number of skilled Installers required	2
	Installation Time without Foundation	5 - 7 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,1 × 0,1 × 1,9 0-4 × 0-4 × 6-3
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	85,0 187,4
	Shipping Volume (m³) Shipping Volume (ft³)	1,83 64,6
	Total Weight (kg) Total Weight (lbs)	480,0 1058,2
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Tube Framework:



Framework®- steel tubes, Ø 60,3 mm (2 3/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Spheres:

Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The tensioning ball incorporates an AstemTT® net tensioning system. Securely closed with durable EPDM-caps.

Spatial Net:

Rope crossing points are localized with durable, drop forged aluminum cloverleaf rings and drop forged aluminum-ferrules (no plastic connections). In situ-replaceable rope strands (no special tools required). Rope Ø 16 mm (5/8").

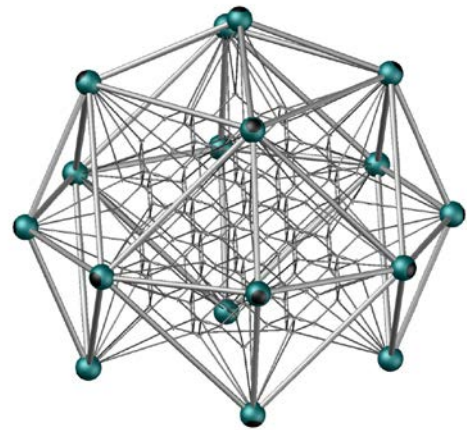

1:200