

# Swingo.2.3

HodgePodge



  
Berliner  
Play equipment for life

Published: March 2025

## Swingo.2.3

### Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

The bigger one-bay-swing takes a child to new heights. In order to sustain the increased dynamics, the structure is supported by tripods.

## 90.260.503

|                                                                                    |                                                                                                                                                        |                                                              |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
|    | Product Family                                                                                                                                         | <b>HodgePodge</b>                                            |
|    | Length x Width x Height (m)<br>Length x Width x Height ("")                                                                                            | <b>4,6 x 2,5 x 3,2</b><br><b>14-11 x 8-2 x 10-6</b>          |
|    | Protective Surfacing Area acc. to DIN EN 1176 (m)<br>Protective Surfacing Area acc. to ASTM/CSA (m)<br>Protective Surfacing Area acc. to ASTM/CSA ("") | <b>9,1 x 1,8</b><br><b>12,4 x 8,2</b><br><b>40-6 x 26-11</b> |
|    | Fall Height acc. to EN 1176 (m)<br>Fall Height acc. to ASTM/CSA ("")                                                                                   | <b>1,76</b><br><b>10-2</b>                                   |
|    | Age                                                                                                                                                    | <b>3</b>                                                     |
|    | Minimum Space required acc. to DIN EN 1176 (m²)<br>Minimum Space required acc. to ASTM 1487 (ft²)                                                      | <b>16,0</b><br><b>547,4</b>                                  |
|    | Number of Foundations                                                                                                                                  | <b>6</b>                                                     |
|    | Concrete Volume C20/C25 (m³)<br>Concrete Volume C20/C25 (ft³)                                                                                          | <b>0,9</b><br><b>31,8</b>                                    |
|    | Number of skilled Installers required                                                                                                                  | <b>2</b>                                                     |
|    | Installation Time without Foundation                                                                                                                   | <b>2 hours</b>                                               |
|   | Dimensions of largest Part (m)<br>Dimensions of largest Part ("")                                                                                      | <b>0,1 x 0,5 x 4,0</b><br><b>0-4 x 1-8 x 13-2</b>            |
|  | Weight of heaviest Part (kg)<br>Weight of heaviest Part (lbs)                                                                                          | <b>22,0</b><br><b>48,5</b>                                   |
|  | Shipping Volume (m³)<br>Shipping Volume (ft³)                                                                                                          | <b>1,9</b><br><b>67,1</b>                                    |
|  | Total Weight (kg)<br>Total Weight (lbs)                                                                                                                | <b>290,0</b><br><b>639,3</b>                                 |
|  | Spare Part Guarantee                                                                                                                                   | <b>Lifelong</b>                                              |

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data



Technical changes are reserved.  
The following text can also be used for tenders.

### Framework:

Stainless steel tube bends Ø 60.3 mm (2 3/8"), connected to Frameworx®-aluminum ball connectors, Ø 250 mm (9-13/16"), anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process, securely closed with durable EPDM-caps.

### Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes.

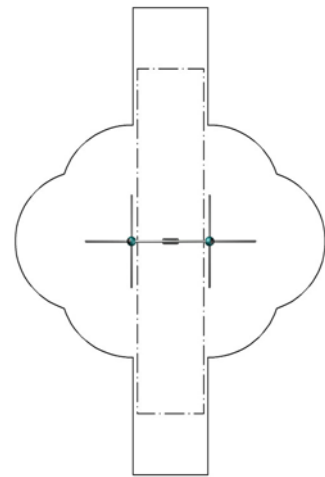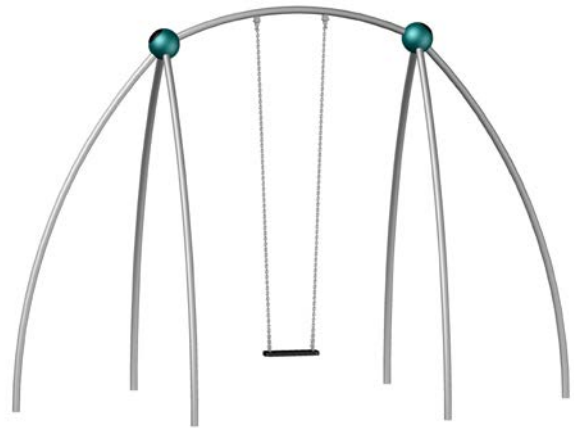

1:200