

Triple Swingo

HodgePodge



Published: May 2025
















Triple Swingo Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.


Three times the fun. Hammock, Toddler and standard swing in one structure.

Triple Swingo

90.340.004

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	10,8 × 1,7 × 2,2 35-5 × 5-7 × 7-0
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	10,2 × 7,2 14,4 × 7,8 47-3 × 25-5
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,2 6-5
	Age	3
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	65,6 1032,0
	Number of Foundations	8
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	1,0 35,3
	Number of skilled Installers required	3
	Installation Time without Foundation	5 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,1 × 0,1 × 3,2 0-4 × 0-4 × 10-6
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	30,0 66,1
	Shipping Volume (m³) Shipping Volume (ft³)	2,7 95,4
	Total Weight (kg) Total Weight (lbs)	373,0 822,3
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

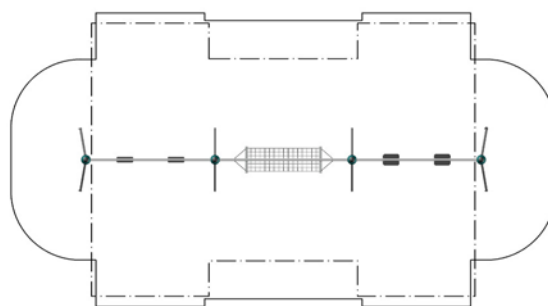

1:200

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Spheres:

Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").

Tubes:

Framework®- steel tubes, Ø 60,3 mm (2 3/8"). Anti-corrosion treatment and color finish: sandblasting, sensimir galvanised and solvent-free epoxy-/ polyester-process.

Swing Seat:

The durable black ebonite seat is hanging on a stainless steel chain with pivot bearings fixed to the horizontal pipe in maintenance-free PA-bushes.

Hammock:

Rope Ø 16 mm (5/8"), hammock net with mesh width approx. 100 x 100 mm (3-15/16" x 3-15/16"). With two in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps. Connected to two swivel joints at Terranos®-clamps.