

# VIP Swing 2.0

HodgePodge



Published: June 2025
















## VIP Swing 2.0

### Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

With its curved posts the VIP Swing 2.0 fits wonderfully to any other Berliner play equipment. It requires communication and collaboration between the players and trains the children's sense of balance and their agility.

95.190.809

	Product Family	<b>HodgePodge</b>
	Length x Width x Height (m) Length x Width x Height ("")	<b>4,8 x 2,2 x 5,2</b> <b>15-7 x 6-11 x 16-11</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	<b>9,6 x 3,5</b> <b>13,5 x 7,3</b> <b>44-1 x 23-9</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	<b>2,1</b> <b>11-1</b>
	Age	<b>5</b>
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	<b>33,5</b> <b>684,0</b>
	Number of Foundations	<b>2</b>
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	<b>2,8</b> <b>99,0</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>4 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>4,6 x 0,8 x 0,2</b> <b>15-2 x 2-8 x 0-8</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>100,0</b> <b>220,5</b>
	Shipping Volume (m³) Shipping Volume (ft³)	<b>2,1</b> <b>74,2</b>
	Total Weight (kg) Total Weight (lbs)	<b>570,0</b> <b>1256,6</b>
	Spare Part Guarantee	<b>Lifelong</b>

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.  
The following text can also be used for tenders.

### Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").

### Tubes:

Frameworkx®- steel tubes, Ø 60,3 mm (2 3/8"). Anti-corrosion treatment and color finish: sandblasting, sensimir galvanised and solvent-free epoxy-/ polyester-process.

### Spreader bar:


Frameworkx®- stainless steel tubes Ø 60,3 mm (2 3/8"), smoothed and brushed/ polished.

### Spheres:

Frameworkx®- aluminum ball connectors, Ø 200 mm (7 7/8") und Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

### Pendulum Seats:

Round rubber seat on sheathed stainless steel chain wich is connected rotatable to a Frameworkx®- aluminum ball connector. Connected to the posts by 4 bracing ropes at Frameworkx®- aluminum ball connectors wit swivel joints.

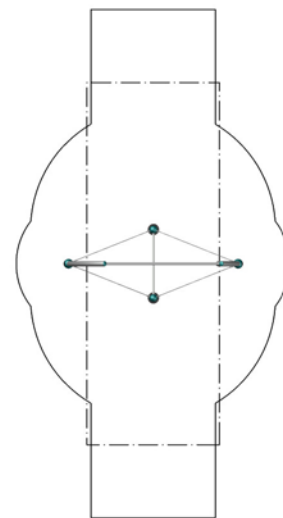

1:200