

Cloud 9

HodgePodge



Published: March 2026

Cloud 9

Product Specification
















HodgePodge is an imaginative, diverse set of play equipment and elements that offer a variety of actions everywhere – even in the middle of the city: e.g., swinging, rocking, and rotating. They also complement the play functions of a playground. Equipment for physical activities, such as a high bar, parallel bars or a complete Calisthenics installation can also be found here. New to the HodgePodge product group are our play points formerly known as URBAN DESIGN. What all HodgePodge equipment has in com-



mon is its enormous load capacity, technically advanced construction, and high design standards.

Our Cloud 9 is an accessible nest swing that allows multiple children to experience the feeling of „floating on clouds“ together. This swing also provides children with special needs the opportunity to enjoy swinging with other children or a companion.

Cloud 9

97.100.025

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("-")	3,3 × 1,3 × 2,1 10-8 × 4-2 × 6-9
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("-")	6,7 × 2,5 7,5 × 7,0 24-5 × 22-8
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("-")	1,24 6-2
	Age	2-12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	16,7 360,5
	Number of Foundations	2
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	0,7 24,8
	Number of skilled Installers required	2
	Installation Time without Foundation	1 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("-")	0,2 × 0,2 × 3,1 0-8 × 0-8 × 10-3
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	70 154,3
	Shipping Volume (m³) Shipping Volume (ft³)	2 70,6
	Total Weight (kg) Total Weight (lbs)	360 794
	Spare Part Guarantee	Lifelong

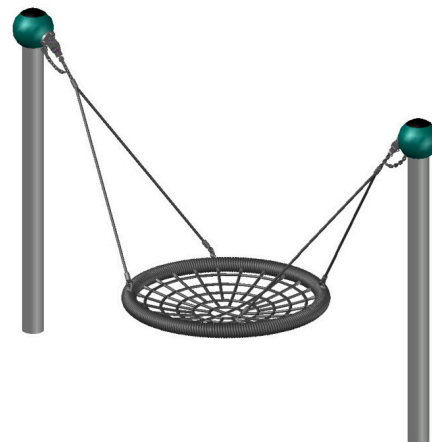

1:200

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Nest Swing Seat:

Ø 1200 mm (3'-11 1/4"). Galvanized steel ring covered with shock-absorbing material and wrapped with rope. Tight-knit net made of rope Ø 16 mm (5/8") is hung into the ring. The connection parts are made of stainless steel.

Spheres:

Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 7,1 mm (9/32"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").