

Shout.11

Twist & Shout



Published: March 2025
















Shout.11

Product Specification

Arches of different sizes can be combined at various angles. No matter whether the climbing structure is 5 or 500 metres long, the net made of original Berliner U-Rope provides continuous climbing fun for young and old alike on a varied and challenging climbing course. Shout's steel frames run parallel.

The shape of the Cloverleaf Ring of this Shout structure is even more recognisable from a bird's eye perspective. The basis of this play equipment was our Cloverwood play structure. Climbing Ropes and Rubber Mats with handles extend the play value.

95.190.458

	Product Family	Twist & Shout
	Length × Width × Height (m) Length × Width × Height ("")	9,1 × 9,1 × 2,9 29-8 × 29-8 × 9-4
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	13,7 × 12,1 12,7 × 12,7 41-8 × 41-8
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	2,74 9-0
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	114,0 1220,6
	Number of Foundations	16
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	7,8 280
	Number of skilled Installers required	3
	Installation Time without Foundation	12 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	2,8 × 0,8 × 0,5 9-3 × 2-8 × 1-8
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	175 385
	Shipping Volume (m³) Shipping Volume (ft³)	25 900
	Total Weight (kg) Total Weight (lbs)	7200 15800
	Spare Part Guarantee	Lifelong

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Arch Structure:

The steel pipes with a diameter of Ø 168,3 mm (6 5/8") and a wall thickness of 10 mm (3/8") are sandblasted and powder-coated in a solvent-free epoxypolyester-process.

Ropes:



The U-Rope® with strand cores and rope core made of galvanised wires has outer strands which are covered with highly abrasion-resistant and highly UV-resistant polyester yarn (not polypropylene). The rope diameter is Ø 18 mm (11/16").

Planar Nets:

The planar nets with a rope diameter of Ø 18 mm (11/16") and a mesh size of at least 250 x 250 mm (9 13/16" x 9 13/16") are permanently localised at the rope crossing points by durable drop-forged aluminium balls (no plastic).

Charlotte-Connector:

Internal fastening system for single rope endings at the arch tubes. The fixing works without hooks or visible ferrules, pre-prepared net segments can easily get fixed permanent but replaceable inside the tubes.

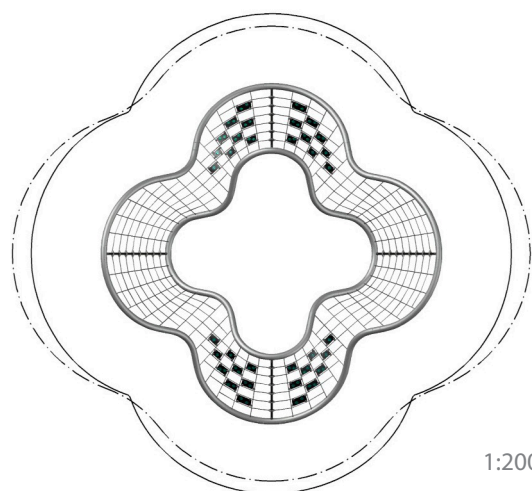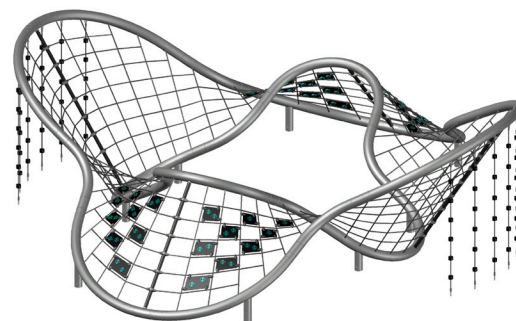

1:200

Rubber Membrane:

Rubber membrane comprised of durable, vandal-resistant conveyor belt material. Thickness approx. 9mm (3/8"). Climbing handles: HDPE.

Climbing Rope:

Ropes Ø 18 mm (11/16"). Vertical ropes with durable ebonite cylinders. Distance between cylinders approx. 300 mm (11-13/16"). The ebonite cylinders are fixed to the rope with aluminum ferrules.