

# Spaceball M

Univers



Published: March 2025
















## Spaceball M Product Specification



Univers showcases see-through outer frame structures with three-dimensional nets inside. This includes classic forms like the Spaceball and Neptun. But also in the Joe Brown Collection, the three-dimensional network found a new home in The Globe or The Cube – the first wooden spatial net structures. All tensioning points are provided with the patented AstemTT tensioning sys-

tem. This ensures that no technical connecting elements or rope loops are located in the play area.

The voluminous Spaceball M invites older kids to climb together with others.

## 90.100.041

	Product Family	Univers
	Length x Width x Height (m) Length x Width x Height ("")	<b>4,4 x 4,4 x 3,8</b> <b>14-5 x 14-5 x 12-5</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	<b>7,5 x 7,5</b> <b>8,1 x 8,1</b> <b>26-5 x 26-5</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	<b>1,59</b> <b>6-0</b>
	Age	<b>5 - 12</b>
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	<b>42,1</b> <b>523,7</b>
	Number of Foundations	<b>4</b>
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	<b>0,4</b> <b>14,1</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>5 - 7 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>0,1 x 0,1 x 1,9</b> <b>0-4 x 0-4 x 6-3</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>85,0</b> <b>187,4</b>
	Shipping Volume (m³) Shipping Volume (ft³)	<b>1,83</b> <b>64,6</b>
	Total Weight (kg) Total Weight (lbs)	<b>480,0</b> <b>1058,2</b>
	Spare Part Guarantee	<b>Lifelong</b>

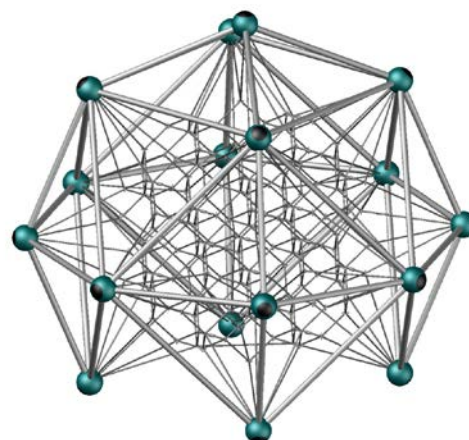

1:200

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

### Tube Framework:

Framework®- steel tubes, Ø 60,3 mm (2 3/8"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Spheres:

Framework®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The tensioning ball incorporates an AstemTT® net tensioning system. Securely closed with durable EPDM-caps.

### Spatial Net:

Rope crossing points are localized with durable, drop forged aluminum cloverleaf rings and drop forged aluminum-ferrules (no plastic connections). In situ-replaceable rope strands (no special tools required). Rope Ø 16 mm (5/8").