

Speedway

HodgePodge



Published: April 2024
















Speedway


Product Specification

All you need is speed. The cable ride is a fun game in a new design without bulky supports. Two big steel arches allow a more open design. The cable ride requires sufficient ground clearance and is available in different lengths up to 108 feet. Dimensions slightly different if equipped with a launch platform.

Speedway

97.110.004

	Product Family	HodgePodge
	Length x Width x Height (m) Length x Width x Height ("")	30,0 x 2,2 x 3,2 98-6 x 7-3 x 10-5
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	30,0 x 4,0 33,7 x 5,9 110-6 x 19-2
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,0 6-8
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	114,0 2074,9
	Number of Foundations	4
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	5,4 190,7
	Number of skilled Installers required	3
	Installation Time without Foundation	6 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	2,1 x 2,0 x 0,2 6-11 x 6-7 x 0-8
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	140 308,6
	Shipping Volume (m³) Shipping Volume (ft³)	4 142
	Total Weight (kg) Total Weight (lbs)	1020 2249
	Spare Part Guarantee	Lifelong

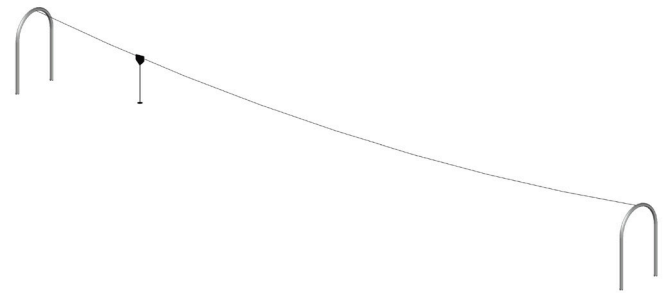

1:400

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Posts:

Steel pipes Ø 140 mm (5 1/2"), wall thickness 12,5 mm (1/2"), connected by steel pipe bends Ø 133 mm (5 1/4"), wall thickness 8 mm (5/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Ropes:

Ø 10 mm (3/8"), 17 x 7 mm (11/16" x 1/4"), similar DIN3069+SE with galvanized wires, for a gentle and durable run of the trolley. Robust tension device connected to both cable ends with turnbuckle M20. Heavy-duty stoppers featuring Polyamide-buffers at steel brackets, end station with rubber buffer and robust compression spring.

Trolley:

Enclosed casing made from stainless steel, safety pendulum seat suspended from coated chain.