

Swingo.04

HodgePodge



Published: February 2025
















Swingo.04


Product Specification

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

The big sister of Swingo.01 not only takes you higher but also lets you swing together with your best friend.

90.160.151

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	5,9 × 2,5 × 3,1 19-4 × 8-2 × 10-0
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	8,8 × 3,1 11,3 × 9,6 36-11 × 31-4
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,62 9-3
	Age	2 - 12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	27,3 675,1
	Number of Foundations	6
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	0,75 26,5
	Number of skilled Installers required	2
	Installation Time without Foundation	2 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,1 × 0,1 × 4,0 0-4 × 0-4 × 13-2
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	25,0 55,1
	Shipping Volume (m³) Shipping Volume (ft³)	1,3 46,0
	Total Weight (kg) Total Weight (lbs)	240,0 530,0
	Spare Part Guarantee	Lifelong

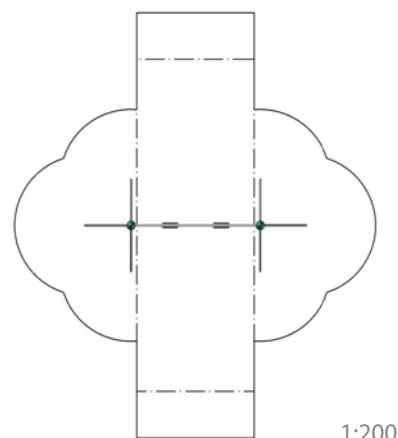

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Framework:

Stainless steel tube Ø 60.3 mm (2 3/8"), connected to Framework®-aluminum ball connectors, Ø 250 mm (9-13/16"), anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps.

Swing seat:

The black rubber safety swing seat is by stainless steel chains rotatable mounted to the cross tube mounted in maintenance free nylon bushes.