

# Terrano.3296

Terranos & Terranova



Published: August 2025

## Terrano.3296

### Product Specification
















Our netscapes offer children of all ages plenty of space for any kind of climbing, crawling, balancing and other physical activities. The highly accessible components are also the ideal place to get engaged in imaginative play or just to hang around and relax. Thanks to the transparent design, our natural netscapes and their young users are easily supervised. The range of rope accessories can turn any space into a netscape. Whether straight or sloping,

there is always space for a two dimensional net or a hand-over-hand climbing component.

The centre of this small combination is the so-called Wasp's Nest, which, once climbed, invites you to hang out and relax with friends. The play structure is complemented by a horizontal bar and two low rope course elements from the Terranos & Terranova series, that promote balance.



95.173.296

	Product Family	<b>Terranos &amp; Terranova</b>
	Length × Width × Height (m) Length × Width × Height ("")	<b>11,2 × 4,2 × 3,6</b> <b>36-6 × 13-8 × 11-10</b>
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	<b>14,2 × 7,5</b> <b>14,8 × 7,9</b> <b>48-6 × 25-8</b>
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	<b>2,44</b> <b>8-1</b>
	Age	<b>5 - 12</b>
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	<b>64,1</b> <b>803,6</b>
	Number of Foundations	<b>5</b>
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	<b>2,9</b> <b>102,4</b>
	Number of skilled Installers required	<b>2</b>
	Installation Time without Foundation	<b>20 hours</b>
	Dimensions of largest Part (m) Dimensions of largest Part ("")	<b>1,5 × 1,5 × 1,5</b> <b>5-0 × 5-0 × 5-0</b>
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	<b>80,0</b> <b>176,4</b>
	Shipping Volume (m³) Shipping Volume (ft³)	- -
	Total Weight (kg) Total Weight (lbs)	- -
	Spare Part Guarantee	<b>Lifelong</b>

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

## Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

### Spheres:

Frameworkor®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

### Terranos®- Clamps:



Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

### Ropes:

U-Rope®-round strand ropes with galvanized and covered wires. External strands with non-abrasive UV-resistant polyester-yarn (no polypropylene), Ø 16 mm (5/8").

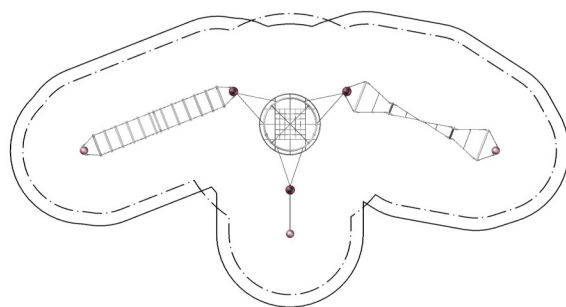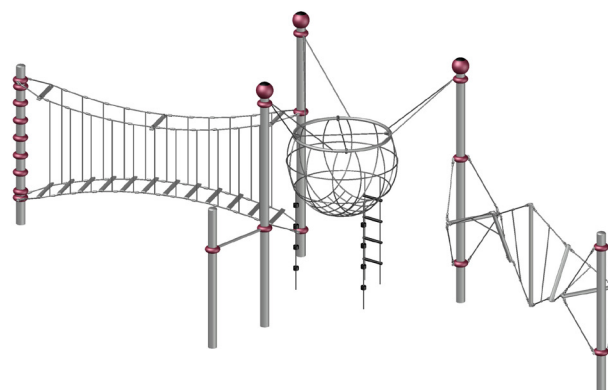

1:200

### Rope Ladder:

Rope Ø 16 mm (5/8"), black polyamide rungs: Ø 40 mm (1 1/2"), 350 mm length (1'-2").

### Climbing Rope:

Rope Ø 18 mm (11/16") with durable ebonite cylinders. Distance between cylinders approx. 300 mm (11 13/16"). The ebonite cylinders are fixed to the rope with aluminum ferrules.

### Wasps' Nest:

Ball-shaped net connected to steel ring Ø 1530 mm (5'- 1/4") and pipe diameter 48.3 mm (1'7/8") with cast aluminum rope clamps. Steel ring suspended from Ropes to three steel posts. Rope diameter Ø 16 mm (5/8").

### Sway Bridge:

Arched suspension bridge; rope Ø 16 mm (5/8"). Rungs with durable stainless steel profile, both ends closed with durable and replaceable aluminum caps (no wood or plastics); in situ-replaceable. Connected to steel post with Terranos®- clamps.

### Inverted Ladder:

Folded suspension bridge, rope Ø 16 mm (5/8"). Rungs with durable stainless steel tubes Ø 60,3 mm (2 3/8"), both ends closed with durable aluminum caps (no wood or plastics), in situ-replaceable. Connected to steel post with Terranos®- clamps.