

Side Swing

HodgePodge



Published: March 2025
















Side Swing Product Specification



HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Swinging together is still the most fun! With the side swing, you can let the wind blow around your nose together.

Side Swing

90.340.120

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("")	3,6 × 0,9 × 2,9 11-8 × 2-11 × 9-5
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("")	8,1 × 3,0 9,8 × 7,1 32-0 × 23-4
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("")	1,42 8-0
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	24,0 492,8
	Number of Foundations	2
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	1,2 42,4
	Number of skilled Installers required	2
	Installation Time without Foundation	3 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("")	0,5 x 0,5 x 2,4 1-8 x 1-8 x 7-11
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	55,0 121,3
	Shipping Volume (m³) Shipping Volume (ft³)	- -
	Total Weight (kg) Total Weight (lbs)	- -
	Spare Part Guarantee	Lifelong

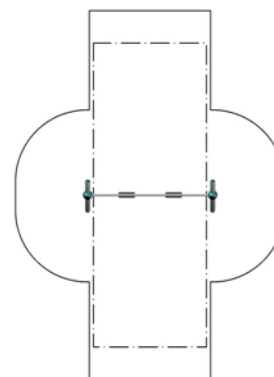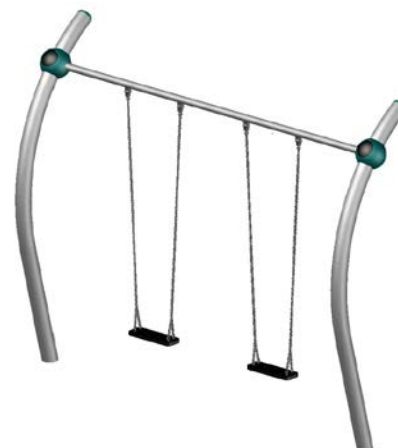

1:200

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Posts:

Steel pipes Ø 133 mm (5 1/4"), wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Spheres:

Frameworkx®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. Securely closed with durable EPDM-caps.

Swing Seat

The durable black ebonite seat is hanging on a stainless steel chain with pivot bearings fixed to the horizontal pipe in maintenance-free PA-bushes.