

Speedway.013

HodgePodge



Published: January 2026















Speedway.013 Product Specification



HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. Climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

All it takes is a little boost. Cable ride means lot of fun – without the need for bulky frames. Sleek, oversized arches create a light and open design, while the ride begins from the net launch platform with exciting pendulum seats. Available in lengths of up to 33 meters (108 feet), with custom sizes available on request.

Speedway.013

90.110.013

	Product Family	HodgePodge
	Length × Width × Height (m) Length × Width × Height ("-")	28,2 × 2,3 × 3,7 92-6 × 7-5 × 12-1
	Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("-")	31,7 × 5,3 31,9 × 5,9 104-6 × 19-5
	Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("-")	0,93 8-5
	Age	5-12
	Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	127,7 1961,5
	Number of Foundations	4
	Concrete Volume C20/C25 (m³) Concrete Volume C20/C25 (ft³)	6,2 219,0
	Number of skilled Installers required	4
	Installation Time without Foundation	8 hours
	Dimensions of largest Part (m) Dimensions of largest Part ("-")	0,2 × 2,3 × 1,8 0-8 × 7-7 × 5-11
	Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	135,0 297,6
	Shipping Volume (m³) Shipping Volume (ft³)	5,8 204,8
	Total Weight (kg) Total Weight (lbs)	1430,0 3152,6
	Spare Part Guarantee	Lifelong

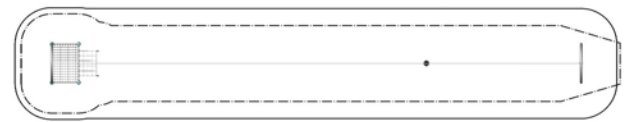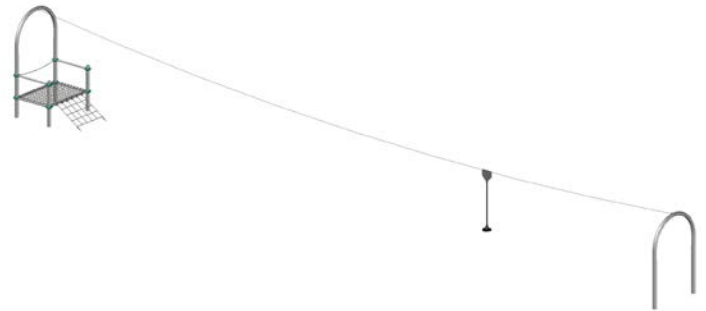

1:400

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

Technical Data

Technical changes are reserved.

The following text can also be used for tenders.

Posts:

Steel pipes Ø 140 mm (5 1/2"), wall thickness 12,5 mm (1/2"), connected by steel pipe bends Ø 133 mm (5 1/4"), wall thickness 8 mm (5/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Tubes:

Frameworx®- stainless steel tubes Ø 60,3 mm (2 3/8"), smoothed and brushed.

Ropes:

Ø 10 mm (3/8"), 17 x 7 mm (11/16" x 1/4"), similar DIN3069+SE with galvanized wires, for a gentle and durable run of the trolley. Robust tension device connected to both cable ends with turnbuckle M20. Heavy-duty stoppers featuring Polyamide-buffers at steel brackets, end station with rubber buffer and robust compression spring.

Terranos®- Clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Trolley:

Enclosed casing made from stainless steel, safety pendulum seat suspended from coated chain.

Access Net:

A planar net with a rope diameter of 16 mm (5/8") and a mesh size of at least 250 x 250 mm (10" x 10"). The rope crossing points are fixed by durable drop forged aluminum ball knots (no plastic).

Planar Nets:

Rope Ø 16 mm (5/8"), mesh size minimum 250 x 250 mm (10" x 10"). Rope crossing points localized by durable, drop forged aluminum ballknots (no plastic).