Woodville Combi.012

Woodville

Published: February 2026

Woodville Combi.012

Product Specification

In contrast to typical wooden playground units, Woodville distinguishes itself through its individual design and its durability. This is achieved through the use of high-quality materials and the hybrid design of wood and steel.
Thanks to its low height off the ground, which allows easy access, the Woodville Combi.12 is ideal for small children. Various climbing features, such as the at net, rope ladder and ramp over various levels of climbing diffculty. The transition bridge, which encourages the little ones to both test and improve their sense of balance, is a particular highlight.

Woodville Combi.012

90.224.101.2

Product Family	**Woodville**
Length × Width × Height (m) Length × Width × Height ('-")	**7,1 × 4,2 × 3,0** **23-3 × 13-7 × 9-10**
Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ('-")	**10,6 × 6,9** **7,8 × 10,8** **25-7 × 35-3**
Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ('-")	**0,93** **3-1**
Age	**2-12**
Minimum Space required acc. to DIN EN 1176 (m^2) Minimum Space required acc. to ASTM 1487 (ft^2)	**46,5** **624,5**
Number of Foundations	**5**
Concrete Volume C20/C25 (m^3) Concrete Volume C20/C25 (ft^3)	**5,45** **193,0**
Number of skilled Installers required	**3**
Installation Time without Foundation	**8 hours**
Dimensions of largest Part (m) Dimensions of largest Part ('-")	**2,1 × 1,5** **6-11 × 5-0**
Weight of heaviest Part (kg) Weight of heaviest Part (lbs)	**100** **220,5**
Shipping Volume (m^3) Shipping Volume (ft^3)	**16,0** **563,0**
Total Weight (kg) Total Weight (lbs)	**2678,0** **5904,0**
Spare Part Guarantee	**Lifelong**

The dimensions of the equipment and protective surfacing area have been rounded up to one decimal digit.

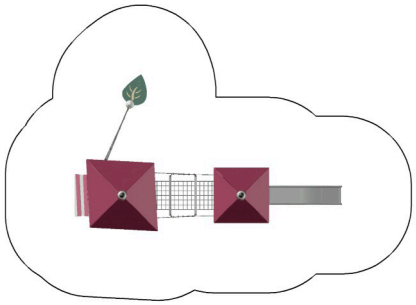

1:200

Technical Data

Technical changes are reserved.
The following text can also be used for tenders.

Wooden Wall Panels:
Panels from 19 mm (3/4") solid wood sandwich panel. Core spruce, surface larch. All edges are rounded. Easily connected to the tube at the framework with cast aluminum tube clamps.

Posts:
Terranos®- steel pipes Ø 133 mm (5 1/4"), wall thickness 7,1 mm (5/16") with a round cast aluminum post top. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process.

Terranos®- Clamps:
Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos®- steel posts. Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. Frox-connectors for ropes which are completely enclosed and free from any entrapment risks.

Tubes:
Frameworx®- stainless steel tubes Ø 60,3 mm (2 3/8"), smoothed and brushed.

Spheres:
Frameworx®- aluminum ball connectors, Ø 250 mm (9 13/16"). Anti-corrosion treatment and color finish: sandblasting and solvent-free epoxy-/ polyester-process. The ball incorporates an embedded fastening system. Securely closed with durable EPDM-caps.

Platforms:
Non-skid HPL-panel, thickness 19 mm (3/4"). Connected to steel pipes with cast aluminum panel clamps.

Roof, Window and Door Openings:
Made of solid colored 19 mm (3/4") thick HDPE panels to ensure durability, deter vandalism, and to remain structurally sound for generations. The sturdy material helps to prevent cracks and breaks. Extremely UV-resistant and color-proof. All edges are rounded.

Vertical Planar Net:
Rope Ø 16 mm (5/8"), mesh size minimum 250 x 250 mm (10 " x 10 "). Rope crossing points localized by durable, drop forged aluminum ballknots (no plastic).

Suspension Bridge:
Rope Ø 16 mm (5/8"), small mesh size approx. 100 x 100 mm (3 15/16" x 3 15/16"). Rope crossing points localized by durable, drop forged aluminum ballknots (no plastic). With in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps.

Mud Table:
Made of solid colored 19 mm (3/4") thick HDPE panels to ensure durability, deter vandalism, and to remain structurally sound for generations. The sturdy material helps to prevent cracks and breaks. Extremely UV-resistant and color-proof. All edges are rounded.

Straight Box Slide:
Straight box slide made of stainless steel, ground and polished. The cheeks are welded with stainless steel handrails.